




FIG.1B



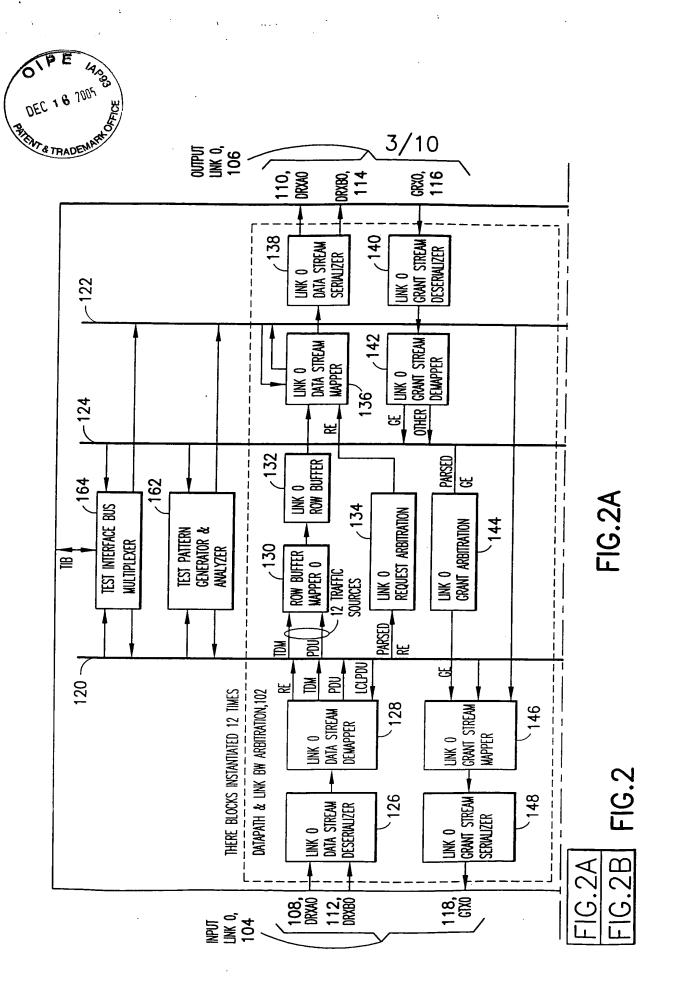

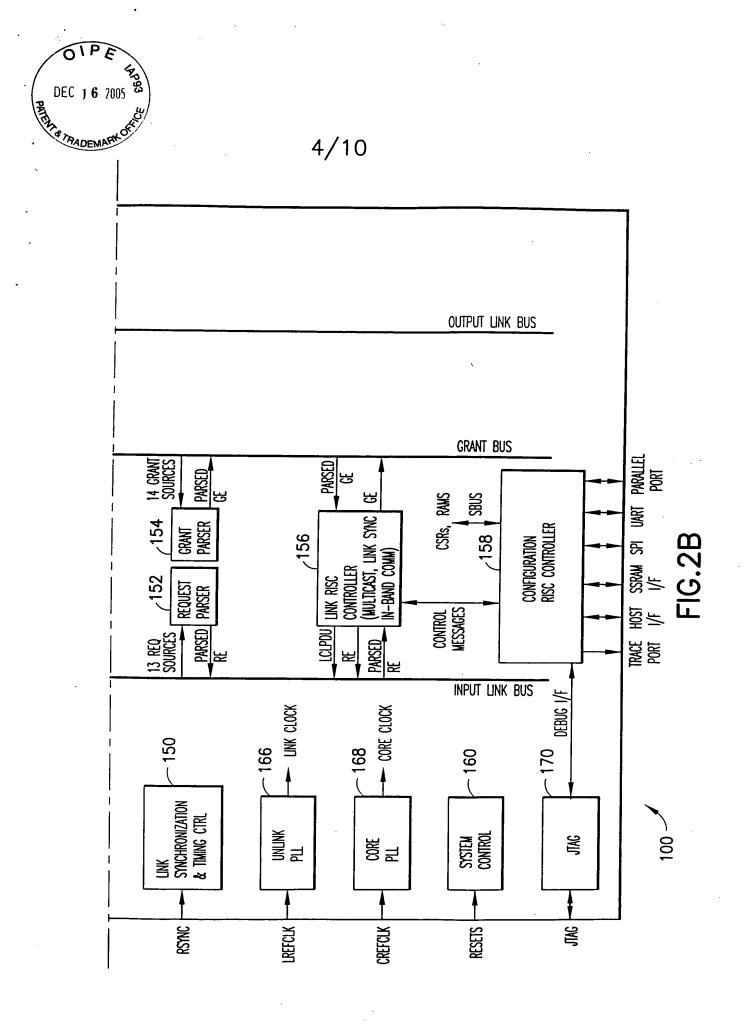

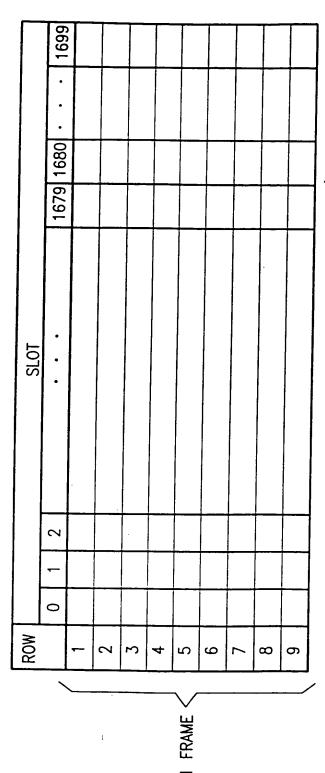

FRAME = 125 us

LINK OVERHEAD

ROW = 125 us/9 = 13.89 us

1 SLOT = 4 BIT TAG + 32 BIT PAYLOAD SERIAL BIT RATE = 1700 SLOTS/ROW \* 36 BITS/SLOT \* 9 ROWS/FRAME \* 8 kHz =

= 550,800 BITS/FRAME = 4.4064 Gbps ROW SIZE = 1700 SLOTS/ROW = 7,650 BYTES/ROW = 61,200 BITS/ROW 1 SLOT BANDWIDTH = SLOT RATE \* 36 BITS/SLOT = 72 kHz \* 36 = 2.592 Mbps


FIG.3



	6/10						
0							
_			İ	-			
2	1	SEO #					
3	1	SS		\mathcal{m}	_	}	12
4	1		1		<u>₩</u>		世
5	1			8	8		9
9	1	l		8	8		₹
7	1			PAYLOAD BYTE 3	PAYLOAD BYTE 7		PAYLOAD BYTE 51
8	1					-	†=
6	1						
0	1						Ì
-	1			7	9		2
2	1			l iii	빝		l H
31	1	ł	9	B	B		B
4	1		<u>§</u>	8	8		8
23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0	1	FRAG 10 A FFS	DEST FLOW ID	PAYLOAD BYTE 2	PAYLOAD BYTE 6	İ	PAYLOAD BYTE 50
16		4	띰				
17				1			
18		<b>  ≥ 3 3 3 3 3 3 3 3 3 3</b>	ł			]	
19				-	5		46
20				PAYLOAD BYTE 1	PAYLOAD BYTE 5		PAYLOAD BYTE 49
17				9	9		9
22	Ì	0		[2]	70		70
23	1	00 N		₽	₽		<b> </b> ₩
24	9						
25	C T						
26		$\mathbb{S}$					_
27	8			0	4		₩
28	0			37.E	3XTE		<u> </u>
29	0	⋈		9	9		9
30	PDU 0 0 ROUTING TAG	VER VALID BYTES	S	PAYLOAD BYTE 0	PAYLOAD BYTE 4		PAYLOAD BYTE 48
31	ы	VEI	FFS	ΡĄ	PA		PA
32							
33							
34	RITY	RITY	RITY	RITY	RITY		RITY
35	0 PARITY	PARITY	2 PARITY	3 PARITY	4 PARITY		PA
SLOT 35 34 33 32 31 30 29 28 27 26 25 24	0	-	2	3	4	• • •	15 PARITY
N N							

FIG.3a



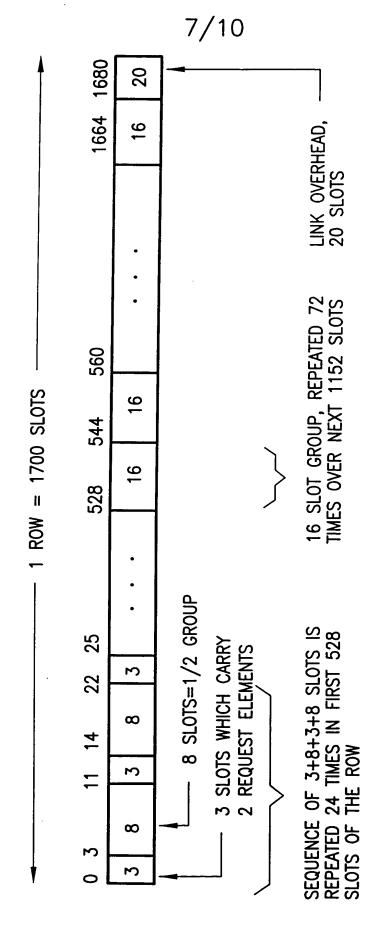

TOTAL NUMBER OF GROUPS: 96

FIG.3b

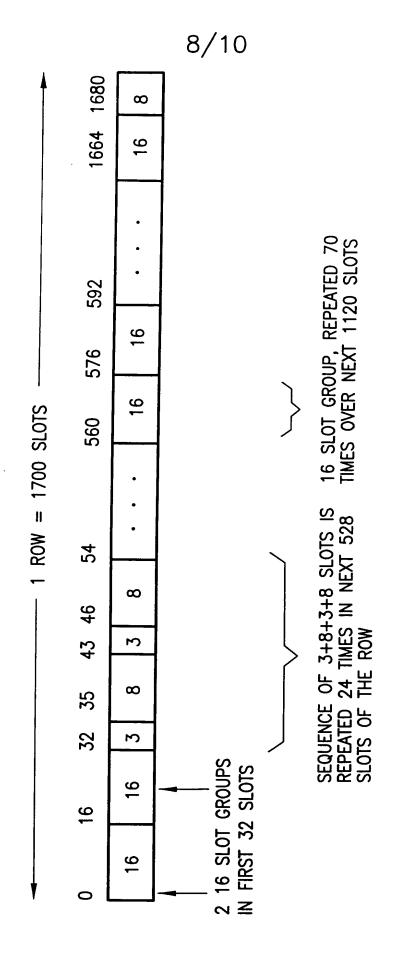
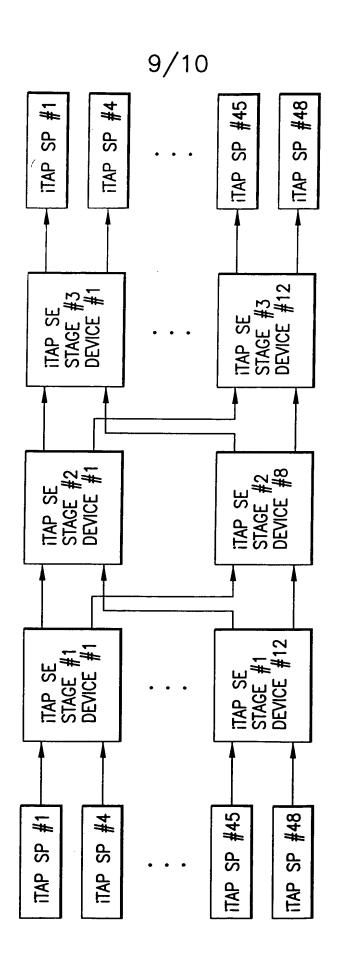


FIG.3c





**FIG.4** 



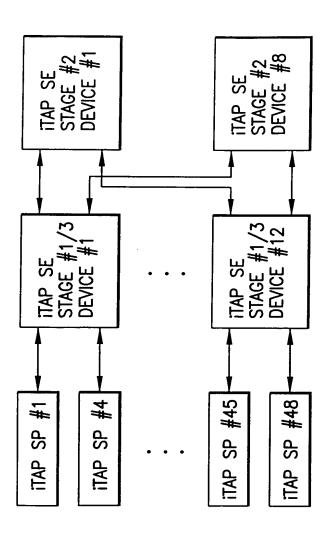


FIG.5